




We provide our customers with exceptional **PRODUCTS** in accordance with the highest international standards and also provide **SERVICES** that meets our customers' needs or exceed their expectations.

Powered by: **PROLINK**

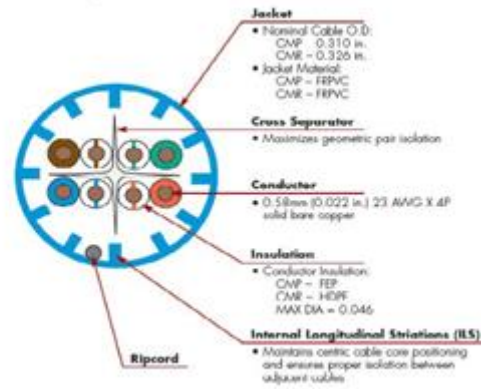

Description Cable	ProLink CAT 6A U/UTP CABLE, 4 PAIR 23 AWG , LSZH , White , 305 m length Reel in a box														
Cable Reference	PROLINK Positioning CAT.6A U/UTP														
Cable construction	Conductor Solid copper wire AWG23 (Ø 0.58mm).														
	Insulation Polyethylene ≤ Ø 7.0 mm.														
	Cable lay up 4 pairs to the core, non-metallic cross separator (spline)														
	Cable corralling Waterproof compound to prevent moisture migration and water protection.														
	Sheath White, LSZH														
Application	Primary (Campus), Secondary (Riser), Tertiary (Horizontal) IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T; IEEE 802.5 16 MB; ISDN; TPDDI; ATM IEEE 802.3af-2002: POE; IEEE 802.3at: POE+ Outdoor installations. Filled with compound to prevent water penetration. To ensure electrical properties even in continuous wet conditions.														
Standards	ISO/IEC 11801 ed. 2.2; IEC 61156-5 2nd ed.; EN 50173-1; TIA 568-C.2; Fire rating: IEC 60332-1; IEC 60754-2; IEC 61034														
Water penetration rating	IEC 60794-1-2F5, method B														
Fire rating	(PE outer sheath) IEC 60754-2; Smoke classic cation: No														
Technical Data	<table border="0"> <tr> <td><u>Cable designation</u></td> <td>Industry U/UTP Cat.6 500MHz 4PxAWG23</td> </tr> <tr> <td><u>Packaging</u></td> <td>Drum 305 m</td> </tr> <tr> <td><u>Outer diameter</u></td> <td>Nominal 7.2 mm</td> </tr> <tr> <td><u>Weight</u></td> <td>20 kg / km</td> </tr> <tr> <td><u>Thermal load</u></td> <td>1884 MJ / km</td> </tr> <tr> <td><u>Segregation class</u></td> <td>b</td> </tr> <tr> <td><u>Tensile force</u></td> <td>100N</td> </tr> </table>	<u>Cable designation</u>	Industry U/UTP Cat.6 500MHz 4PxAWG23	<u>Packaging</u>	Drum 305 m	<u>Outer diameter</u>	Nominal 7.2 mm	<u>Weight</u>	20 kg / km	<u>Thermal load</u>	1884 MJ / km	<u>Segregation class</u>	b	<u>Tensile force</u>	100N
<u>Cable designation</u>	Industry U/UTP Cat.6 500MHz 4PxAWG23														
<u>Packaging</u>	Drum 305 m														
<u>Outer diameter</u>	Nominal 7.2 mm														
<u>Weight</u>	20 kg / km														
<u>Thermal load</u>	1884 MJ / km														
<u>Segregation class</u>	b														
<u>Tensile force</u>	100N														

