

We provide customers with satisfactory products and services according to international standards, to meet different customer needs.



# **PR-FV8842**



## Description

Standing server rack with Vented door, 4 fans, 1 shelf and 1 PDU 8 outlet

#### Main material:

Cold-rolled steel

### Load capacity:

Static load: 800KG

## Surface treatment:

Degreasing, pickling, phosphating ,laundering, powder coating

### Features:


- 🚢 Exquisite design with precise dimensions and craftsmanship
- Two side panels for each side can be separately open with locks, which are easy to operation and maintenance
- Two back sides with multifunctional cable routing panels
- High-class locks
- Lasters and support feet can be installed simultaneously
- Optional pedestals for fixation, cable routing, ventilation, and rat proof
- Lurved front screen door & back double screen door enable equipment to ventilate well
- Various optional accessories
- Pro-Rack logo is printed on the side panel






# PR-FV8842

## Structure



- 1. Top cover
- 2. Bottom plate
- 3. Fans
- 4. Frame
- 5. Front door
- 6. Back door
- 7. Side panel
- 8. Horizontal bracket
- 9. Profile rails
- 10. Shelf
- 11. Cable manager
- 12. Junction box
- 13. Caster
- 14. Support foot


## Size

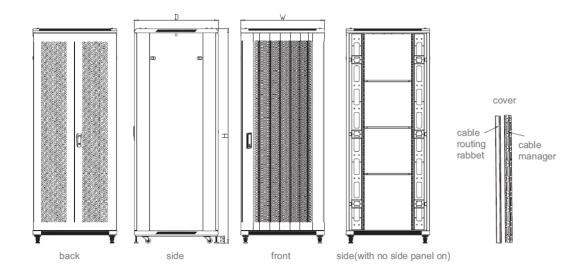


2



# Installing

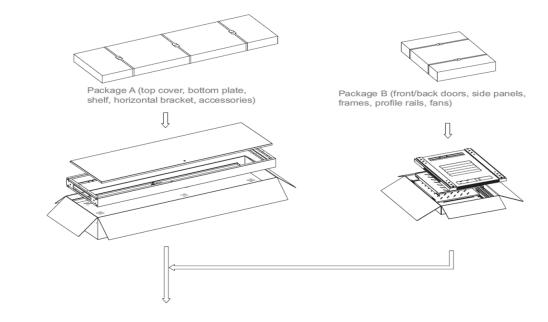









# **Technical parameters:**

| NANES                 | QUANTITY | UNIT | MATERIALS   | SURFACE<br>TREATMENT | REMARKS          |
|-----------------------|----------|------|---|----------------------|------------------|
| Top Covers            | 1        | Pc   | 1.2mm cold-rolled steel                                 | powder coating       |                  |
| Bottom plates         | 1        | Pc   | 1.2mm cold-rolled steel                                 | powder coating       |                  |
| Fans                  | 4        | Pc   | 1.2mm cold-rolled steel                                 | powder coating       |                  |
| Frames                | 2        | Pc   | 1.2mm cold-rolled steel                                 | powder coating       |                  |
| Front doors           | 1        | Pc   | 5mm tempered glasses<br>1.2mm cold-rolled quality steel | powder coating       | door type E or B |
| Back doors            | 1        | Pc   | 1.2mm cold-rolled steel                                 | powder coating       | door type K      |
| Side panels           | 2        | Pc   | 1.0mm cold-rolled steel                                 | powder coating       |                  |
| Rails                 | 4        | Pc   | 2.0mm cold-rolled steel                                 | powder coating       |                  |
| Shelves               | 1        | Pc   | 1.2mm cold-rolled steel                                 | powder coating       |                  |
| Casters               | 4        | Pc   |   |                      |                  |
| M12 support feet      | 4        |      |   |                      |                  |
| Cage nuts             | 40       |      |   |                      |                  |
| Sockets with 8 outlet | 1        |      |   |                      |                  |
| Beams                 | 6        | Pc   | 1.2mm cold-rolled steel                                 | powder coating       |                  |
| Junction boxes        | 12       | Pc   | 2.0mm cold-rolled steel                                 |                      |                  |

| TYPES                     | PR-FV8842     |  |  |
|---------------------------|---------------|--|--|
| TTPE5                     | F K-F V 0042  |  |  |
| CAPACITY (U)              | 42U           |  |  |
| WIDTH                     | 800           |  |  |
| DEPTH                     | 800           |  |  |
| HEIGHT                    | 2055          |  |  |
|                           | WHOLE PACKAGE |  |  |
| WIDTH                     | 202           |  |  |
| WIDTH                     | 820           |  |  |
| DEPTH                     | 1020          |  |  |
| HIGHT                     | 2065          |  |  |
| VOLUME (M <sup>3</sup> )  | 1.389         |  |  |
|                           | FLAT PACKAGE  |  |  |
| PACKAGE A                 | 1980*820*320  |  |  |
| PACKAGE B                 | 1020*820*130  |  |  |
| PACKAGE C                 | 1910*60*730   |  |  |
| VOLUMES (M <sup>3</sup> ) | 0.607         |  |  |
| Front Door                | Vented        |  |  |

# Color:

**BLACK (RAL9005)** 

